

ELECTRIC SERIES SCISSOR LIFTS

SC05E(SC0928E)/SC06E(SC1328E)

Complies with ISO/CE/ANSI/KCS/EAC standards

PRODUCT HIGHLIGHTS

Reduced maintenance costs

- Lower cost of ownership with highly versatile parts and components
- Rapid, convenient transportation with forklift slot and Lifting hole
- Drawer type control box, easy maintenance

Efficient and environmentally friendly

- Higher work efficiency
- Environmental protection, zero emissions
- Folding guardrails for easy transport

Reliable performance

- Rear-wheel drive, more powerful climbing performance
- Small turning radius, flexible operation



Standard features

Proportional controls	Emergency lowering system	Work schedule
Self-lock gate on platform	Emergency stop button	Safety brackets
Unidirectional extended platform	Tubing explosion system	Forklift pockets
Full travel	Fault diagnosis system	Charger protection
Non-marking tyres	Tilt protection system	Flashing beacon
Motor drive	All Motion Alarm	Folding guardrails
Automatic brakes system	Horn	Automatic pothole protection

Optional features

Overload sensor	Platform work lights	
AC power on the platform	Airline to the Platform	

NOBLELIFT

www.noblelift.com




NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD.

ELECTRIC SERIES SCISSOR LIFTS

SC05E(SC0928E)/SC06E(SC1328E)

Complies with ISO/CE/ANSI/KCS/EAC standards

Model	SC05E(SC0928E)	SC06E(SC1328E)
Dimensions		
Max Working Height	4.9m(16'1")	5.9m(19'4")
A Max Platform Height	2.9m(9'6")	3.9m(12'10")
B Max Horizontal Extension	0.6m(2')	0.6m(2')
C Length-Stowed	1.44m(4'9")	1.44m(4'9")
D Width-Stowed	0.76m(2'6")	0.76m(2'6")
E Height-stowed (Rail Folded)	1.62m(5'4")	1.71m(5'7")
E Height-stowed (Rail Unfolded)	2.02m(6'8")	2.11m(6'11")
F Wheelbase	1.05m(3'5")	1.05m(3'5")
Ground Clearance(Pothole Guard Stowed)	0.06m(2.4")	0.06m(2.4")
Ground Clearance(Pothole Guard Deployed)	0.015m(0.6")	0.015m(0.6")
Platform Dimensions(LxWxH)	1.29x0.7mx1.1m (4'3"x2'4"x3'7")	1.29x0.7mx1.1m (4'3"x2'4"x3'7")
Performance		
Platform Allowable Occupants (Indoors/Outdoors)	2persons	2persons
Platform Capacity	240kg(530 lbs)	240kg(530 lbs)
Drive Speed-Stowed	4 km/h(2.5 mph)	4 km/h(2.5 mph)
Drive Speed-Raised	0.5km/h(0.3 mph)	0.5km/h(0.3 mph)
Elevation Time(Unloaded)	22sec	25sec
Descent Time(Unloaded)	20sec	27sec
Gradeability	25%	25%
TurningRadius(Inside/Outside)	0/1.55m(0/5'1")	0/1.55m(0/5'1")
Tilt Rating(Front to Back/Side to Side)	3°/1.5°	3°/1.5°
Tire Spec/Type	230x80mm(9x3")/solid	230x80mm(9x3")/solid
Power		
Batteries	2x12V/80Ah	2x12V/80Ah
Power Source	24V DC	24V DC
Drive Mode	Motor, back-wheel	Motor, back-wheel
Charger Input	100~240V AC	100~240V AC
Charger Output	15A	15A
Hydraulic Tank Capacity	3L(0.66gal(UK) / 0.79gal(US))	3L(0.66gal(UK) / 0.79gal(US))
Weight		
Weight(Indoor & Outdoor)	880kg(1940 lbs)	895kg (1973 lbs)

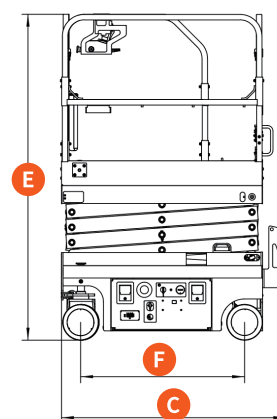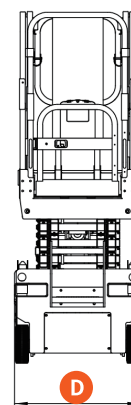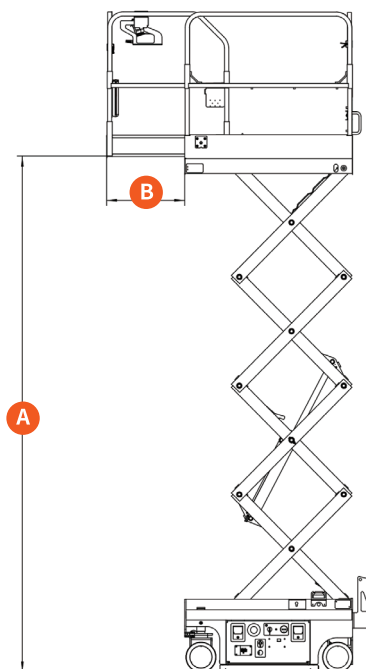

We reserve the right to make specification changes without notification.
The above represents the current specifications at time of publication. 05.2024